

AX1500 Next-Gen Wi-Fi 6 Router

Next-Gen Wi-Fi For All





Faster AX Wi-FiSpeeds up to 1.5 Gbps











Ultra-Low Latency
by AX TechConnect More Devices
with OFDMAResponsive Processing
with 1.5 GHz Triple-Core CPUFull Gigabit
Ports



Highlights

Wi-Fi 6 | 802.11 AX Future-Proof Your Wi-Fi

Improved Efficiency, More Connections


Add more Wi-Fi devices to your network without dragging the performance, as Archer AX10 with Wi-Fi 6 builds a more efficient network that increases the average throughput by 4 times and serves more devices.

Immersive Gaming, Smooth Streaming

Enjoy stable network for online gaming and live streams with flawless video and clear audio. OFDMA allows clients to transmit both on uplink and downlink using one band at one time, which cut the latency and ensures a responsive network.

Cover 3+ Rooms with Minimal Interference

With clearer and stronger signal generated with Wi-Fi 6 and Beamforming technology, Archer AX10 delivers data to devices far away by focusing less-interfered wireless signal towards them.

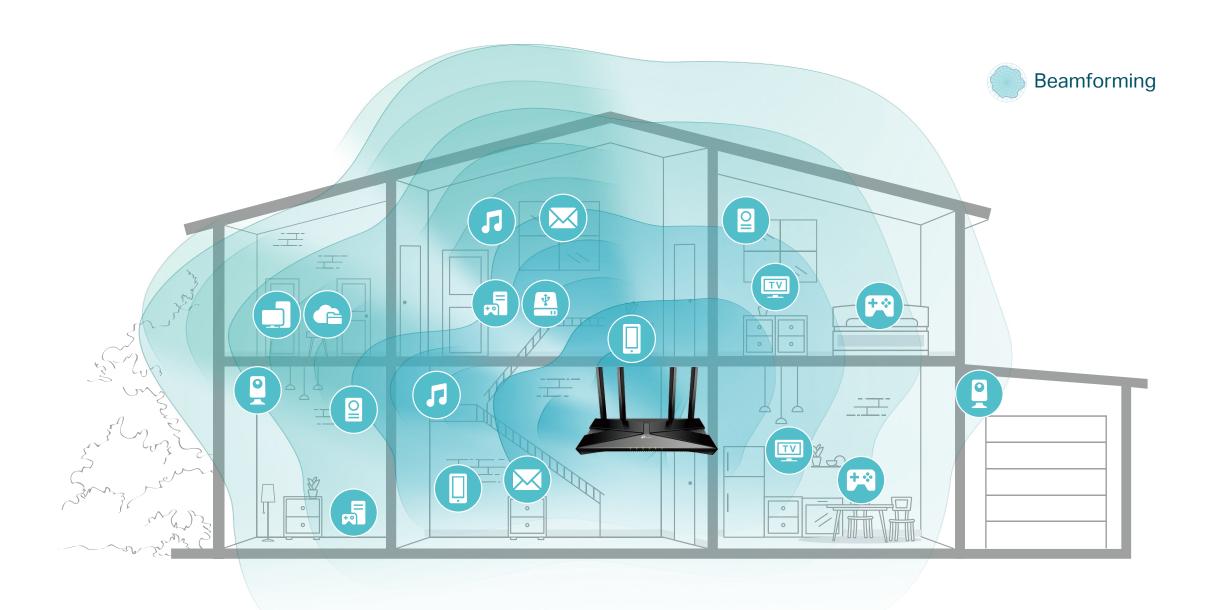


Highlights

Faster Wireless Connection


4-Streams Wi-Fi offers connection at over 1 Gbps speed for newer mobile devices, reducing wait time by 30% while downloading huge files including 4K movies and games.

Powerful and Stable

Every click you make, responds quicker. A 1.5 GHz triple-core CPU handles data throughput up to multi-gigs and minimizes the latency withinyour home network, delivering you a smooth experience.

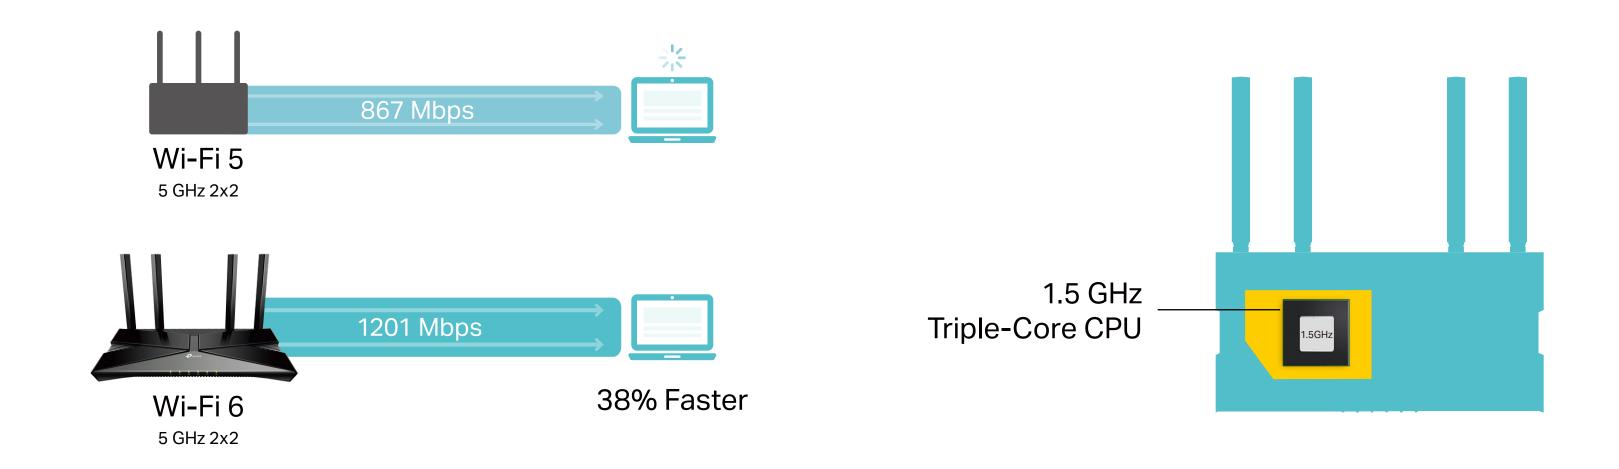


Features

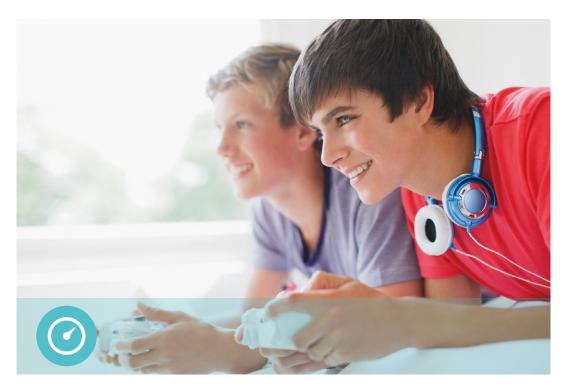

Speed

- AX Tech 802.11ax (also known as Wi-Fi 6) features advanced technologies including OFDMA and 1024QAM, drastically increasing the speed and efficiency of the entire network
- Ultimate Wireless Speed 300 Mbps on 2.4 GHz (802.11n) + 1201 Mbps on 5 GHz (802.11ax)
- 1.5 GHz triple-core CPU Handles data throughput up to multi-gigs and minimizes the latency withinyour home network
- Gigabit Internet Access Take full advantages of broadband speeds up to 1 Gbps

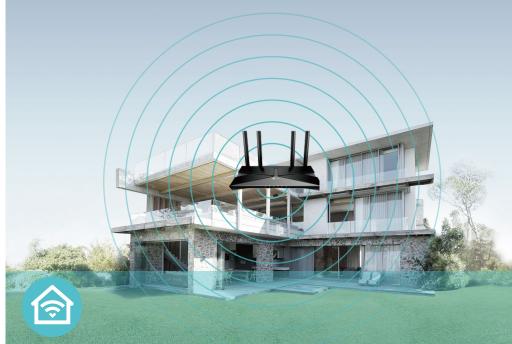

Wi-Fi Range


- Ultimate Range Wi-Fi Four external antennas deliver a Wi-Fi signal to every corner of your home, making all of your connections more efficient and stable
- Beamforming Technology Concentrates Wi-Fi signals
 towards individual devices to ensure stronger connections



Reliability

- Secure VPN Access Connects to a private network with a safe and secure OpenVPN and PPTP VPN connection
- Airtime Fairness Balances bandwidth of connected devices to improve overall throughput and efficiency
- Smart Connect Intelligently switches each device's connection to the optimum available Wi-Fi band
- Quality of Service Prioritizes devices for optimum performance
 when needed

Features

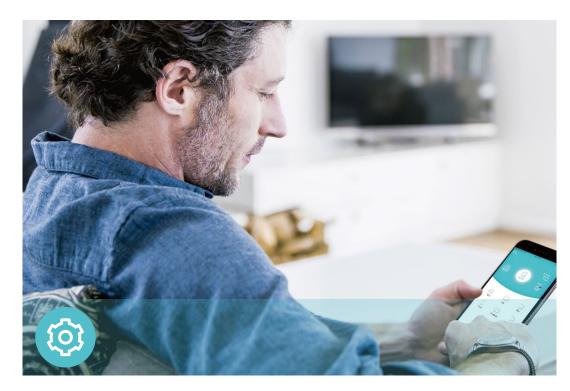

Ease of Use

- Intuitive Web UI Ensures quick and simple Installation without hassle
- Fast Encryption One-touch WPA wireless security encryption with the WPS button
- Easy On/Off Turn on/off wireless function using the Wi-Fi button
- Power On/Off Conveniently power on or off your router as required
- Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether App, available on any Android and iOS device



Security

- · Guest Network Keeps your main network secure by creating a separate network for friends and visitors
- · Access Control Establishes a whitelist or blacklist to allow or restrict certain devices to access the internet
- Parental Controls Restricts internet access time and contents for children devices
- Encryptions for Secure Network WPA-PSK and WPA2-PSK encryptions provide active protection against security threats




TP-Link AX1500 Next-Gen Wi-Fi 6 Router Archer AX10

Specifications

Hardware

- Ethernet Ports: One Gigabit WAN Port, four Gigabit LAN Ports
- Hardware: 1.5 GHz Triple-Core CPU
- Buttons: WPS/Wi-Fi Button, Power On/Off Button, Reset Button
- Antennas: Four External Antennas
- External Power Supply: 12V/1A
- Dimensions (W x D x H): 10.2 × 5.3 × 1.5 in (260.2 × 135.0 × 38.6 mm)

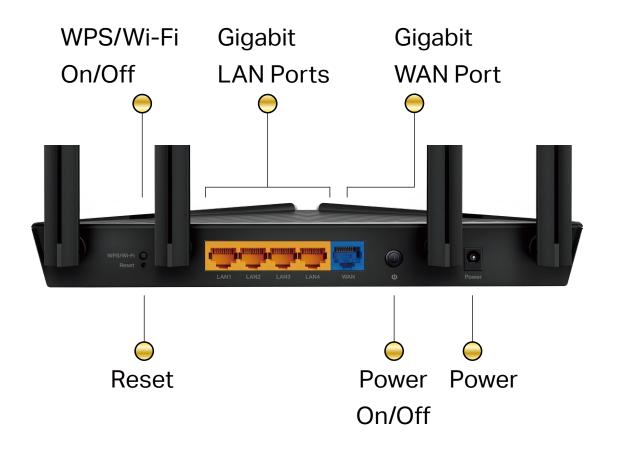

Wireless

- 11a/b/g/n/ac Wi-Fi standards
- Frequency: 2.4 GHz and 5 GHz
- Transmit Power:

- · Reception Sensitivity: 5 GHz:
- 11a 6Mbps:-97dBm, 11a 54Mbps:-79dBm

- 2.4 GHz:
- 11g 6Mbps:-91dBm, 11a 54Mbps:-74dBm

• Wireless: 1201 Mbps (5 GHz, 11ax) + 300 Mbps (2.4 GHz, 11n), compatible with

CE: <20dBm(2.4 GHz), <23dBm(5.15 GHz~5.25 GHz) FCC:<30dBm(2.4 GHz & 5.15 GHz~5.825 GHz)

11ac VHT20_MCS0:-96dBm, 11ac VHT20_MCS11:-66dBm 11ac VHT40_MCS0:-94dBm, 11ac VHT40_MCS11:-63dBm 11ac VHT80_MCS0:-91dBm, 11ac VHT80_MCS11:-60dBm 11ax HE20_MCS0:-95dBm, 11ax HE20_MCS11:-63dBm 11ax HE40_MCS0:-92dBm, 11ax HE40_MCS11:-60dBm 11ax HE80_MCS0:-89dBm, 11ax HE80_MCS11:-58dBm

11n HT20_MCS0:-90dBm, 11n HT20_MCS7:-73dBm 11n HT40_MCS0:-88dBm, 11n HT40_MCS7:-70dBm · Wireless Function: Enable/Disable Wireless Radio, WMM • Wireless Security: 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK encryptions

Specifications

Software

- · Quality of Service: Device Prioritisation
- · WAN Type: Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)
- Management: Access Control, Local Management, Remote Management
- DHCP: Server, DHCP Client List, Address Reservation
- Port Forwarding: Port Forwarding, Port Triggering, UPnP, DMZ
- Dynamic DNS: DynDns, NO-IP, TP-Link
- Access Control: Parental Controls, Local Management Control, Host List, White List, Black List
- Firewall Security: SPI Firewall, IP and MAC Address Binding
- · Protocols: IPv4, IPv6
- · Guest Network: 2.4 GHz Guest Network, 5 GHz Guest Network

Others

- · Certification:
- CE, FCC, RoHS
- System Requirements: NetWare, UNIX or Linux
- Java-enabled browser
- Cable or DSL Modem
- Environment:

- Package Contents
- Wireless Router Archer AX10
- Power Adapter
- **RJ45 Ethernet Cable**
- Quick Installation Guide



For more information, please visit

http://www.tp-link.com/products/details/Archer-AX10.html

or scan the QR code left

Attention: This device may only be used indoors in all EU member states and EFTA countries.

Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders.

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including materials, obstacles, volume and density of traffic, and client location.

*Use of OFDMA and 1024-QAM requires clients to also support those functions.

*4x average throughput refers to 4x increase in median throughput under dense environment (i.e. 8+ Wi-Fi 6 devices connected with combined speeds not higher than ISP offers) compared to a 2×2 11ac wave 2 router. *1,000 Mbps internet speeds require compatible service plans and equipment.

©2020 TP-Link

Microsoft Windows 98SE/NT/2000/XP/Vista™/7/8/8.1/10, MAC OS,

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other

Subscription with an internet service provider (for internet access)

Operating Temperature: 0°C~40°C (32°F ~104°F) Storage Temperature: -40°C~70°C (-40°F ~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

TP-Link AX1500 Next-Gen Wi-Fi 6 Router Archer AX10